


OFFICIAL QUOTE

150KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



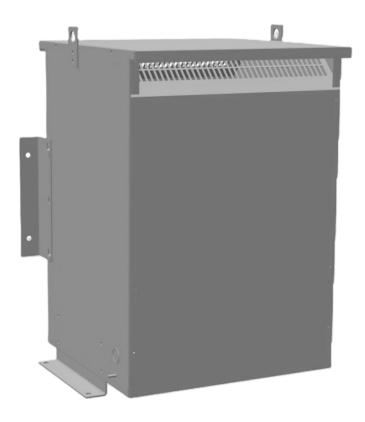

150KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$4,247.10 CAD


Single Phase Autotransformer with a capacity of 150kVA, transforming 277 Volts to 347 Volts

SKU: MC150D-E

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 150kVA, transforming 277 Volts to 347 Volts



OFFICIAL QUOTE



150KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	284.8 lbs
Phases	1
kVA	<u>150</u>
Connection	1PhA-NT-1
Primary Voltage	277
Primary Max Current	312.6A
Primary Markings	<u>X0-X1</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	347
Secondary Max Current	249.6A
Secondary Markings	<u>H0-H1</u>
Secondary Terminals	600MCM-2
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	45 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------