


OFFICIAL QUOTE

6KVA 440 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



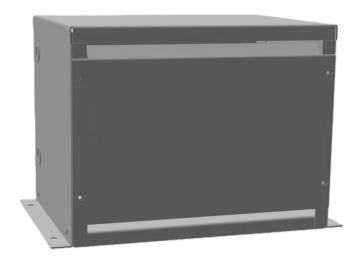

6KVA 440 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

\$1,204.60 CAD

Three Phase Autotransformer with a capacity of 6kVA, transforming 440Y Volts to 575Y Volts

SKU: RC6H2-J1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 6kVA, transforming 440Y Volts to 575Y Volts



OFFICIAL QUOTE 6KVA 440 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	20 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	3PhA-NT-1
Primary Voltage	440
Primary Max Current	7.9A
Primary Markings	X1-X2-X3
Primary Terminals	Terminal Blocks
Secondary Voltage	<u>575</u>
Secondary Max Current	<u>6A</u>
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-1</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 440 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------