




# BC3Q-M

## \$1,566.00 CAD


SKU: 84e20a9fb44b  
Categories: [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

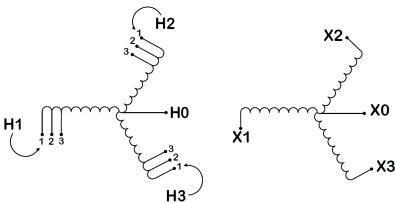

### PRODUCT SPECIFICATIONS

Weight	80 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">3</a>
Connection	<a href="#">3Ph-YY-3T-SD</a>
Primary Voltage	<a href="#">600Y/347</a>
Primary Max Current	<a href="#">2.9A</a>
Primary Markings	<a href="#">H0-H1-H2-H3</a>
Primary Terminals	<a href="#">Terminal Blocks</a>



Secondary Voltage	<a href="#">208Y/120</a>
Secondary Max Current	<a href="#">8.3A</a>
Secondary Markings	<a href="#">X0-X1-X2-X3</a>
Secondary Terminals	<a href="#">Terminal Blocks</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
Insuation Class	<a href="#">180°C</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Impedance	<a href="#">5.5 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 1</a>
Enclosure	<a href="#">E1-3</a>
Finish	<a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Efficiency	<a href="#">N/A</a>