



**25VA 347 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER**



# 25VA 347 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$94.64 CAD**



Single Phase Control Transformer with a capacity of 25VA, transforming 347 Volts to 120/240 Volts

**SKU:** CS25E-K

**Categories:** [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions				Mounting Slot Ø x L	Mounting Slot	
	A	B	C	D			
25	3	4	2.5	2.5	2.5	1.13	0.25 x 0.625
50	3	4	2.5	2.5	2.5	1.13	0.25 x 0.625
100	3	4	2.5	2.5	3	1.375	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	4.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	4.5	0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
1000	6.5	6.75	5.63	5.75	4.25	5.25	0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	5.25	0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	5.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	6.5	0.31 x 0.625
4000	9	10	8	7	7	8	0.44 x 0.825

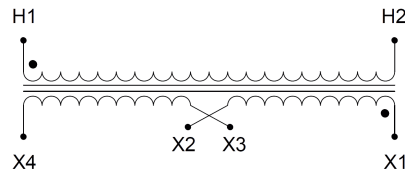

Single Phase Control Transformer with a capacity of 25VA, transforming 347 Volts to 120/240 Volts



## PRODUCT SPECIFICATIONS

Weight	2.3 lbs
Phases	<a href="#">1</a>
Connection	<a href="#">1Ph-CT-SD-SD</a>
Primary Voltage	<a href="#">347</a>
Primary Max Current	<a href="#">0.07A</a>
Primary Markings	<a href="#">H1-H2</a>
Primary Terminals	<a href="#">Terminals</a>
Secondary Voltage	<a href="#">120/240</a>
Secondary Max Current	<a href="#">0.21A</a>
Secondary Markings	<a href="#">X1-X2-X3-X4</a>
Secondary Terminals	<a href="#">Terminals</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Temperatue Rise	<a href="#">80°C</a>
Insuation Class	<a href="#">130°C (Class B)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">Core &amp; Coil</a>
Enclosure Size	<a href="#">See Core &amp; Coil Chart</a>
Finish/Colour	<a href="#">N/A</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE  
25VA 347 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



VA	
Country/Manufacturer	<a href="#">Canada/RPM</a>