


OFFICIAL QUOTE

112.5KVA 600 VOLTS TO 240Y/139 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



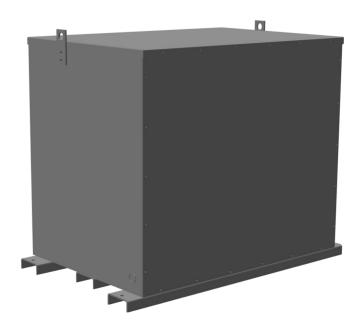

112.5KVA 600 VOLTS TO 240Y/139 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$14,360.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 112.5kVA, transforming 600 Volts to 240Y/139 Volts

SKU: BA112J-S/EP

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 112.5kVA, transforming 600 Volts to 240Y/139 Volts



OFFICIAL QUOTE



112.5KVA 600 VOLTS TO 240Y/139 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

FRODUCT OF LCIT ICATIONS	
Weight	1365 lbs
Phases	3
kVA	112.5
Connection	3Ph-DY-5T-SD
Primary Voltage	600
Primary Max Current	108.3A
Primary Markings	H1-H2-3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	<u>240Y/139</u>
Secondary Max Current	270.6A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	600MCM-2
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Aluminum</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-8</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM