


OFFICIAL QUOTE

200KVA 115 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



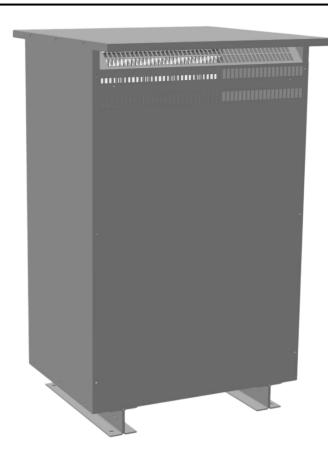

200KVA 115 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$12,319.69 CAD


Single Phase Isolation Transformer with a capacity of 200kVA, transforming 115 Volts to 120/240 Volts

SKU: SA200A1-K/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 200kVA, transforming 115 Volts to 120/240 Volts



OFFICIAL QUOTE



200KVA 115 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1015 lbs
Phases	1
kVA	200
Connection	1Ph-2coil-5T-SU
Primary Voltage	115
Primary Max Current	1739.13A
Primary Markings	<u>X1-X2</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	120/240
Secondary Max Current	1666.67A
Secondary Markings	H1-H2
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.74% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-9S
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



200KVA 115 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

-	Insuation Class	<u>150°C</u>	_
	Country/Manufacturer	Canada/RPM	
	Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	