


OFFICIAL QUOTE

112KVA 110 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



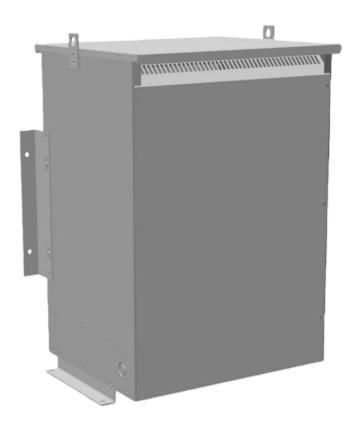

112KVA 110 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$6,802.29 USD

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 110Y Volts to 277Y Volts

SKU: RC112A2-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 112.5kVA, transforming 110Y Volts to 277Y Volts



OFFICIAL QUOTE

112KVA 110 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	570 lbs
Phases	<u>3</u>
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	110
Primary Max Current	<u>590.5A</u>
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	277
Secondary Max Current	234.5A
Secondary Markings	H1-H2-H3
Secondary Terminals	600MCM-2
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 - 4.5%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

112KVA 110 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------