


### **OFFICIAL QUOTE**

### 45KVA 277 VOLTS TO 230 VOLTS THREE PHASE AUTOTRANSFORMER



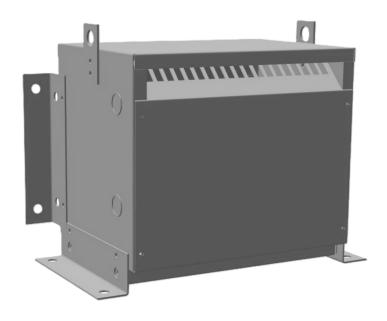

# 45KVA 277 VOLTS TO 230 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,742.88 USD

Three Phase Autotransformer with a capacity of 45kVA, transforming 277Y Volts to 230Y Volts

SKU: RC45D-C1

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 45kVA, transforming 277Y Volts to 230Y Volts



### **OFFICIAL QUOTE**

## VOLTS

## 45KVA 277 VOLTS TO 230 VOLTS THREE PHASE AUTOTRANSFORMER

### **PRODUCT SPECIFICATIONS**

| Weight                     | 56 lbs   |
|----------------------------|--|
| Phases                     | <u>3</u>   |
| kVA                        | <u>45</u>  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 277  |
| Primary Max Current        | 93.8A  |
| Primary Markings           | H1-H2-H3   |
| Primary Terminals          | #2/0-6 AWG   |
| Secondary Voltage          | 230  |
| Secondary Max Current      | 113A   |
| Secondary Markings         | <u>X1-X2-X3</u>  |
| Secondary Terminals        | 300MCM-6   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | 10kV   |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 0.5 - 1.5%   |
| Sound (db)                 | 40   |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-3</u>  |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

## 45KVA 277 VOLTS TO 230 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|