


#### **OFFICIAL QUOTE**

## 75KVA 400 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



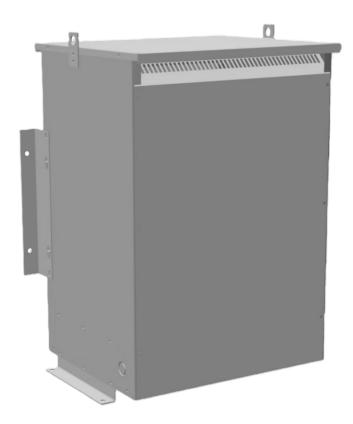

### 75KVA 400 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER


\$7,245.00 CAD


Three Phase Autotransformer with a capacity of 75kVA, transforming 400Y Volts to 120Y Volts

SKU: RC75G1-A

**Categories:** Autotransformer

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 75kVA, transforming 400Y Volts to 120Y Volts



### **OFFICIAL QUOTE**



# 75KVA 400 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	427 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	3PhA-NT-1
Primary Voltage	400
Primary Max Current	108.3A
Primary Markings	H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	120
Secondary Max Current	360.8A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

# 75KVA 400 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------