




500VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER

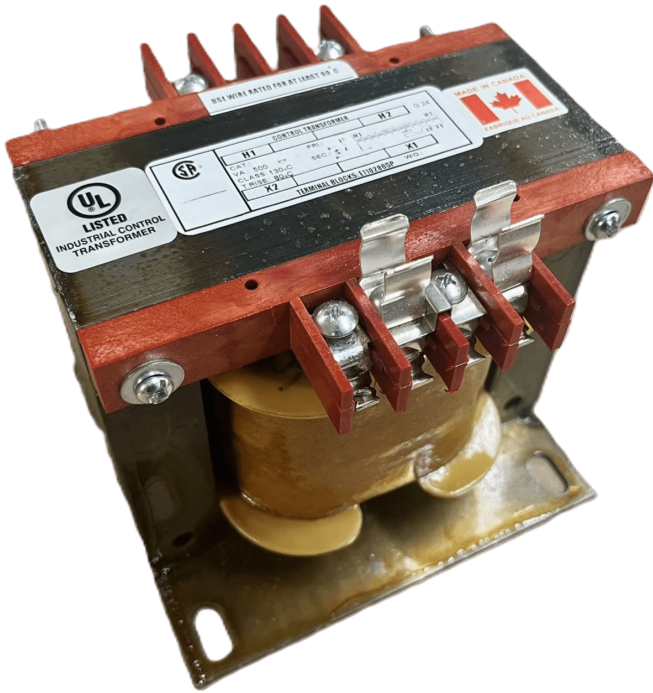

500VA 120/240 VOLTS TO
240/480 VOLTS SINGLE
PHASE CONTROL
TRANSFORMER

\$327.60 CAD



Single Phase Control Transformer with a capacity of 500VA, transforming 120/240 Volts to 240/480 Volts

SKU: CS500K-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions (inches)				Mounting Slot
	A	B	C	F	
25	1	3	2.5	2.5	3.33 0.25 x 0.625
50	1	3	2.5	2.5	3.33 0.25 x 0.625
100	1	4	2.5	2.5	3.75 0.25 x 0.625
150	3.75	4.25	3.33	3.25	3.5 0.25 x 0.625
200	3.75	4.5	3.33	3.25	3.5 0.25 x 0.625
250	3.75	5	3.33	3.25	3.5 0.31 x 0.625
300	4.5	5	3.75	3.75	4.75 0.31 x 0.625
500	5.25	5	4.38	4.5	5.75 0.31 x 0.625
750	5.25	5.5	4.38	4.5	5.75 0.31 x 0.625
1000	5.25	6.5	4.38	4.5	5.75 0.31 x 0.625
1500	6.75	7.25	5.63	5	5.75 0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25 0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5 0.31 x 0.625
5000	9	10	8	7	8 0.44 x 0.625

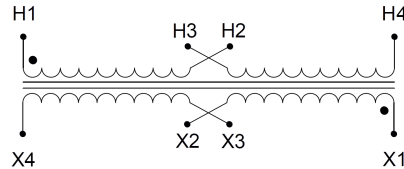

Single Phase Control Transformer with a capacity of 500VA, transforming 120/240 Volts to 240/480 Volts



PRODUCT SPECIFICATIONS

Weight	40 lbs
Phases	1
Connection	1Ph-CT-DD-SU
Primary Voltage	120/240
Primary Max Current	4.17A
Primary Markings	X1-X2-X3-X4
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	2.08A
Secondary Markings	H1-H2-H3-H4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

500VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM