


OFFICIAL QUOTE

3KVA 416 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER



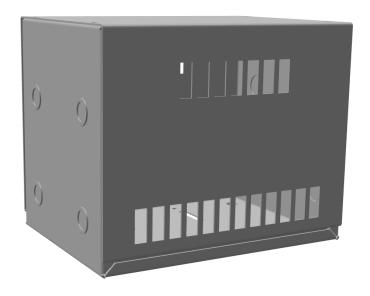

3KVA 416 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$594.80 CAD

Single Phase Autotransformer with a capacity of 3kVA, transforming 416 Volts to 380 Volts

SKU: MC3G-F

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 3kVA, transforming 416 Volts to 380 Volts



OFFICIAL QUOTE



3KVA 416 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 48.8 lbs |
| Phases | 1 |
| kVA | 3 |
| Connection | <u>1PhA-NT-1</u> |
| Primary Voltage | 416 |
| Primary Max Current | 4.2A |
| Primary Markings | <u>H0-H1</u> |
| Primary Terminals | Terminal Blocks |
| Secondary Voltage | 380 |
| Secondary Max Current | 4.6A |
| Secondary Markings | <u>X0-X1</u> |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 180°C (Class F) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | 40 dB |
| Enclosure Type | NEMA 1 |
| Enclosure Size | <u>E1-0</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

3KVA 416 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | <u>Canada/RPM</u> |
|----------------------|-------------------|
|----------------------|-------------------|