




**7.5KVA 208 VOLTS TO 440 VOLTS
SINGLE PHASE AUTOTRANSFORMER**

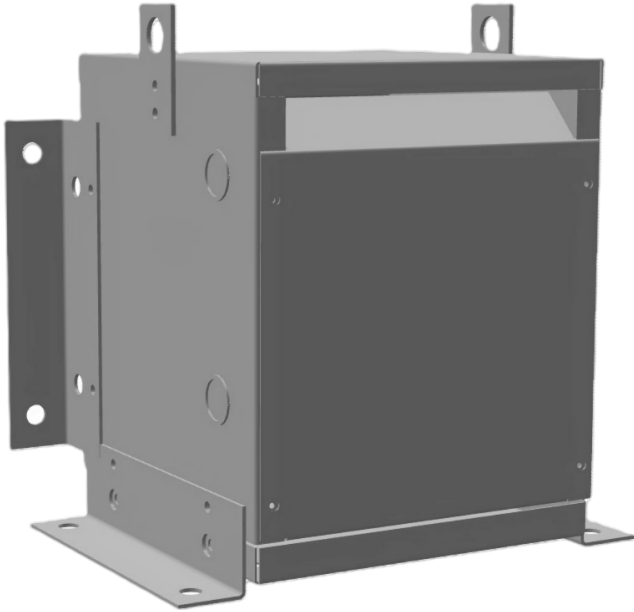

**7.5KVA 208 VOLTS TO 440
VOLTS SINGLE PHASE
AUTOTRANSFORMER**


\$941.41 USD

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 208 Volts to 440 Volts

SKU: MC7B-H2

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



Single Phase Autotransformer with a capacity of 7.5kVA, transforming 208 Volts to 440 Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 75.8 lbs |
| Phases | 1 |
| kVA | 7.5 |
| Connection | 1PhA-NT-1 |
| Primary Voltage | 208 |
| Primary Max Current | 20.8A |
| Primary Markings | X0-X1 |
| Primary Terminals | Terminal Blocks |
| Secondary Voltage | 440 |
| Secondary Max Current | 9.8A |
| Secondary Markings | H0-H1 |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 – 3.5% |
| Sound (db) | 40 dB |
| Enclosure Type | NEMA 1 |
| Enclosure Size | E1-2 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

7.5KVA 208 VOLTS TO 440 VOLTS
SINGLE PHASE AUTOTRANSFORMER



| | |
|----------------------|----------------------------|
| Country/Manufacturer | Canada/RPM |
|----------------------|----------------------------|