


OFFICIAL QUOTE

9KVA 400 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER



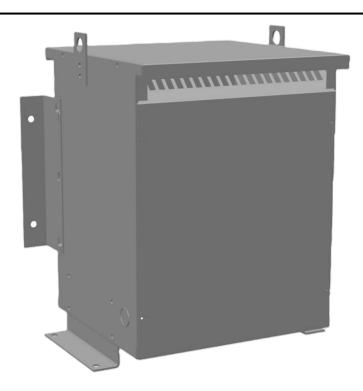

9KVA 400 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$2,414.09 CAD

Three Phase Isolation Transformer with a capacity of 9kVA, transforming 400 Volts to 550Y/318 Volts

SKU: BC9G1-Q2

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 9kVA, transforming 400 Volts to 550Y/318 Volts



OFFICIAL QUOTE



9KVA 400 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | | |
|----------------------------|--|--|
| Weight | 132 lbs | |
| Phases | 3 | |
| kVA | 9 | |
| Connection | 3Ph-DY-3T-SU | |
| Primary Voltage | 400 | |
| Primary Max Current | 12.99A | |
| Primary Markings | <u>X1-X2-X3</u> | |
| Primary Terminals | #2-14 AWG | |
| Secondary Voltage | <u>550Y/318</u> | |
| Secondary Max Current | 9.45A | |
| Secondary Markings | H0-H1-H2-H3 | |
| Secondary Terminals | #2-14 AWG | |
| Primary Taps | +/- 1 x 5% | |
| Conductor Material | Copper | |
| BIL (Insulation) Level | <u>10kV</u> | |
| Efficiency (@35% Load) % | N/A | |
| Impedance Range | <u>5.0 – 7.0%</u> | |
| Sound (db) | 40 | |
| Enclosure Type | NEMA 3R Indoor | |
| Enclosure Size | E3R-4 | |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey | |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered | |
| Temperatue Rise | 150°C | |



OFFICIAL QUOTE



9KVA 400 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER

| - | Insuation Class | 150°C |
|---|----------------------|--|
| | Country/Manufacturer | Canada/RPM |
| | Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |