



**250VA 208 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**



250VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$142.08 USD



Single Phase Control Transformer with a capacity of 250VA, transforming 208 Volts to 120/240 Volts

SKU: CS250B-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions				Mounting Centres (D.C.)	Mounting Size
	A	B	C	M		
25	3	3	2.5	2.5	3.13	0.25 x 0.625
50	3	3	2.5	2.5	3.13	0.25 x 0.625
100	3	4	2.5	2.5	3	0.75 x 0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	4.5 0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	4.5 0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	4.5 0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	4.75 0.31 x 0.625
500	5.25	5.5	4.38	4.5	3.75	4.75 0.31 x 0.625
750	6.00	6.25	5.00	4.75	4.75	4.75 0.31 x 0.625
1000	6.75	7.25	5.62	5	4.75	5.25 0.31 x 0.625
1500	7.5	7.5	6.25	6	5.25	5.25 0.31 x 0.625
2000	7.5	7.5	6.25	6	5.25	5.25 0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	6.5 0.31 x 0.625
5000	9	10	8	7	7	8 0.44 x 0.625

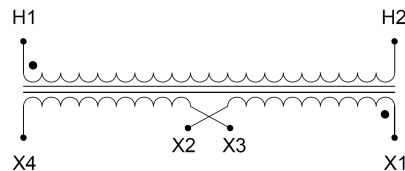

Single Phase Control Transformer with a capacity of 250VA, transforming 208 Volts to 120/240 Volts



PRODUCT SPECIFICATIONS

Weight	10 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	208
Primary Max Current	1.2A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	2.08A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE
250VA 208 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	250
Country/Manufacturer	Canada/RPM