


OFFICIAL QUOTE

15KVA 480 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



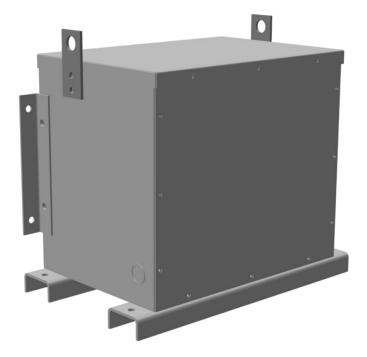


15KVA 480 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$1,861.50 USD

Three Phase Encapsulated Autotransformer with a capacity of 15kVA, transforming 480Y Volts to 240Y Volts

SKU: RC15H-C/EP Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 15kVA, transforming 480Y Volts to 240Y Volts



OFFICIAL QUOTE

15KVA 480 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 400 lbs |
|----------------------------|-----------------------------------------------------------------------------------------|
| Phases | <u>3</u> |
| kVA | <u>15</u> |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | <u>480</u> |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | <u>#2-14 AWG</u> |
| Secondary Voltage | 240 |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>#2-14 AWG</u> |
| Primary Taps | <u>N/A</u> |
| Conductor Material | <u>Copper</u> |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | <u>N/A</u> |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-3PEP-3 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | <u>130°C</u> |
| Insuation Class | <u>200°C (Class N)</u> |

The quote is valid 30 days from 11 June 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.a. Printed: September-16-2024.