




**1KVA 200 VOLTS TO 220/440 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER**

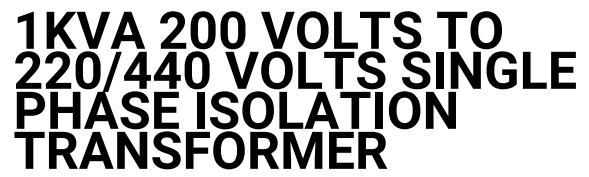

Single Phase Isolation Transformer with a capacity of 1kVA, transforming 200 Volts to 220/440 Volts

Categories: [Isolation Transformers](#)

The quote is valid 30 days from 13 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

1KVA 200 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	35 lbs
Phases	1
kVA	1
Connection	1Ph-1coil-3T-SU
Primary Voltage	200
Primary Max Current	5.0A
Primary Markings	X1-X2
Primary Terminals	#2-14 AWG
Secondary Voltage	220/440
Secondary Max Current	4.55A
Secondary Markings	H1-H2
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-0
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	115°C



OFFICIAL QUOTE

1KVA 200 VOLTS TO 220/440 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey