


OFFICIAL QUOTE

RC45J-B



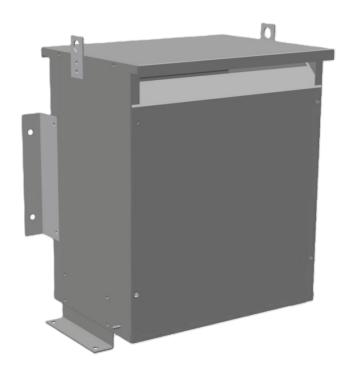


RC45J-B


\$3,331.79 USD

SKU: 29cafdd629b1

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

Weight	270 lbs
Phases	3
kVA	45
Connection	3PhA-NT-1



OFFICIAL QUOTE

RC45J-B



Primary Voltage	600
Primary Max Current	43.3A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	208
Secondary Max Current	<u>124.9A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insuation Class	220°C
BIL (Insulation) Level	<u>10kV</u>
Efficiency	N/A
Impedance	<u>2.5 - 4.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure	<u>E3R-5</u>
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered