



## BC3Q-M

**\$1,566.00 CAD**

SKU: 84e20a9fb44b

Categories: [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

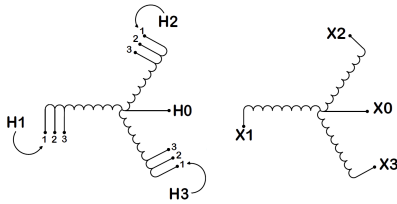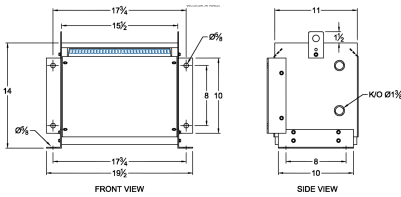

### PRODUCT SPECIFICATIONS

<b>Weight</b>	80 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">3</a>
<b>Connection</b>	<a href="#">3Ph-YY-3T-SD</a>
<b>Primary Voltage</b>	<a href="#">600Y/347</a>
<b>Primary Max Current</b>	<a href="#">2.9A</a>
<b>Primary Markings</b>	<a href="#">H0-H1-H2-H3</a>
<b>Primary Terminals</b>	<a href="#">Terminal Blocks</a>



<b>Secondary Voltage</b>	<a href="#">208Y/120</a>
<b>Secondary Max Current</b>	<a href="#">8.3A</a>
<b>Secondary Markings</b>	<a href="#">X0-X1-X2-X3</a>
<b>Secondary Terminals</b>	<a href="#">Terminal Blocks</a>
<b>Primary Taps</b>	<a href="#">+/- 1 x 5%</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Insulation Class</b>	<a href="#">180°C</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Impedance</b>	<a href="#">5.5 – 7.0%</a>
<b>Sound (db)</b>	<a href="#">40</a>
<b>Enclosure Type</b>	<a href="#">NEMA 1</a>
<b>Enclosure</b>	<a href="#">E1-3</a>
<b>Finish</b>	<a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
<b>Efficiency</b>	<a href="#">N/A</a>