




SC7J-K

\$1,119.43 USD

SKU: 64459d694c7d

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

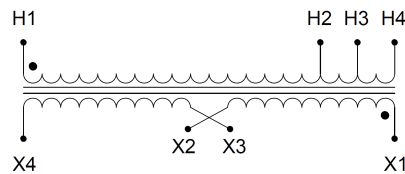

PRODUCT SPECIFICATIONS

| | |
|---------------------|---------------------------------|
| Weight | 120 lbs |
| Phases | 1 |
| kVA | 7.5 |
| Connection | 1Ph-1coil-3T-SD |
| Primary Voltage | 600 |
| Primary Max Current | 12.5A |
| Primary Markings | H1-H2-H3-H4 |



| | |
|----------------------------|--|
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 120/240 |
| Secondary Max Current | 62.5A |
| Secondary Markings | X1-X3-X2-X4 |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | +/- 1 x 5% |
| Conductor Material | Copper |
| Insulation Class | 220°C |
| BIL (Insulation) Level | 10kV |
| Impedance | 5.5 – 7.0% |
| Sound (db) | 40 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | E3R-4 |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency | N/A |