


#### **OFFICIAL QUOTE**

### 7.5KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



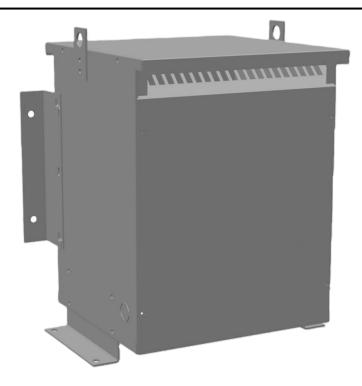

### 7.5KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$1,339.37 USD


Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 575 Volts to 220/440 Volts

SKU: SC7J1-L2

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 575 Volts to 220/440 Volts



#### **OFFICIAL QUOTE**



# 7.5KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### **PRODUCT SPECIFICATIONS**

Weight	128 lbs
Phases	1
kVA	7.5
Connection	1Ph-1coil-3T-SD
Primary Voltage	<u>575</u>
Primary Max Current	13.04A
Primary Markings	H1-H2
Primary Terminals	#2-14 AWG
Secondary Voltage	220/440
Secondary Max Current	34.09A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	#2-14 AWG
Primary Taps	<u>+/- 1 x 5%</u>
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-4</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>150°C</u>



#### **OFFICIAL QUOTE**



# 7.5KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey