


OFFICIAL QUOTE

112KVA 460 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER



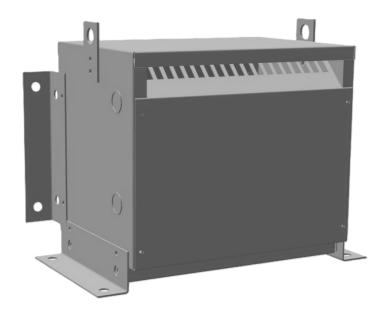

112KVA 460 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,756.70 CAD


Three Phase Autotransformer with a capacity of 112.5kVA, transforming 460Y Volts to 480Y Volts

SKU: RC112H1-H

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 112.5kVA, transforming 460Y Volts to 480Y Volts







PRODUCT SPECIFICATIONS

Weight	32 lbs
Phases	<u>3</u>
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	460
Primary Max Current	141.2A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	300MCM-6
Secondary Voltage	480
Secondary Max Current	135.3A
Secondary Markings	H1-H2-H3
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

112KVA 460 VOLTS TO 480 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------