


#### **OFFICIAL QUOTE**

## 15KVA 575 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



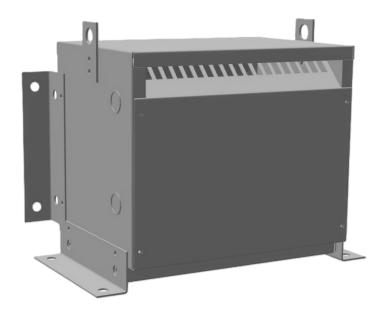

### 15KVA 575 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,652.00 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 575Y Volts to 415Y Volts

**SKU:** RC15J1-G2

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 15kVA, transforming 575Y Volts to 415Y Volts



### **OFFICIAL QUOTE**



# 15KVA 575 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	28 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	3PhA-NT-1
Primary Voltage	<u>575</u>
Primary Max Current	15.1A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	415
Secondary Max Current	20.9A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

# 15KVA 575 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------