


#### **OFFICIAL QUOTE**

## 500KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



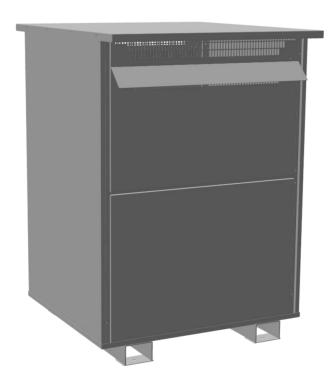

### 500KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER


\$18,253.21 USD


Three Phase Autotransformer with a capacity of 500kVA, transforming 115Y Volts to 416Y Volts

**SKU: RA500A1-G** 

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 500kVA, transforming 115Y Volts to 416Y Volts



### **OFFICIAL QUOTE**





### **PRODUCT SPECIFICATIONS**

Weight	2262 lbs
Phases	<u>3</u>
kVA	500
Connection	3PhA-NT-1
Primary Voltage	115
Primary Max Current	2510.2A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	416
Secondary Max Current	693.9A
Secondary Markings	H1-H2-H3
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-10
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

# 500KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------