


OFFICIAL QUOTE

7.5KVA 115 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



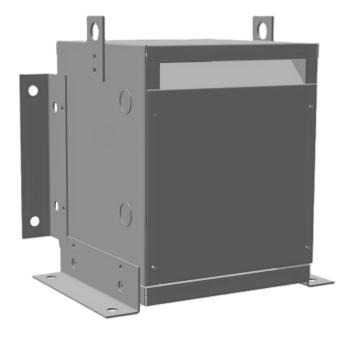

7.5KVA 115 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,446.50 CAD

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 115 Volts to 347 Volts

SKU: MC7A1-E Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 7.5kVA, transforming 115 Volts to 347 Volts



OFFICIAL QUOTE

7.5KVA 115 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 83.4 lbs |
|----------------------------|--|
| Phases | 1 |
| kVA | <u>7.5</u> |
| Connection | <u>1PhA-NT-1</u> |
| Primary Voltage | <u>115</u> |
| Primary Max Current | <u>37.7A</u> |
| Primary Markings | <u>X0-X1</u> |
| Primary Terminals | <u>#2-14 AWG</u> |
| Secondary Voltage | 347 |
| Secondary Max Current | <u>12.5A</u> |
| Secondary Markings | <u>H0-H1</u> |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | N/A |
| Conductor Material | <u>Copper</u> |
| Insulation Class | <u>220°C (Class H)</u> |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | <u>N/A</u> |
| Impedance Range | <u>2.5 - 4.5%</u> |
| Sound (db) | <u>40 dB</u> |
| Enclosure Type | NEMA 1 |
| Enclosure Size | <u>E1-2</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | <u>CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015</u> Registered |



OFFICIAL QUOTE

7.5KVA 115 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM