


### **OFFICIAL QUOTE**

## 75KVA 110 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



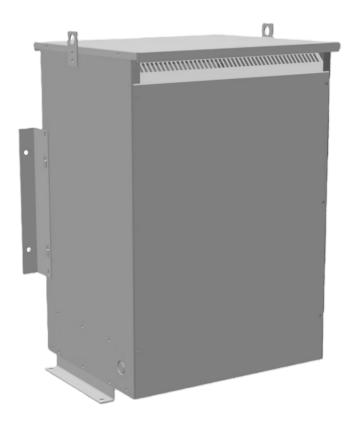

# 75KVA 110 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$6,862.60 CAD

Single Phase Autotransformer with a capacity of 75kVA, transforming 110 Volts to 480 Volts

SKU: MC75A2-H

**Categories:** <u>Autotransformer</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 75kVA, transforming 110 Volts to 480 Volts



## **OFFICIAL QUOTE**



# 75KVA 110 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |   |
|----------------------------|---|
| Weight                     | 470 lbs   |
| Phases                     | 1   |
| kVA                        | <u>75</u>   |
| Connection                 | <u>1PhA-NT-1</u>  |
| Primary Voltage            | 110   |
| Primary Max Current        | 393.6A  |
| Primary Markings           | <u>X0-X1</u>  |
| Primary Terminals          | <u>Pads</u>   |
| Secondary Voltage          | 480   |
| Secondary Max Current      | 90.2A   |
| Secondary Markings         | <u>H0-H1</u>  |
| Secondary Terminals        | #2/0-6 AWG  |
| Primary Taps               | N/A   |
| Conductor Material         | Copper  |
| Insulation Class           | 220°C (Class H)   |
| BIL (Insulation) Level     | <u>10kV</u>   |
| Efficiency (@35% Load) %   | N/A   |
| Impedance Range            | 2.5 - 4.5%  |
| Sound (db)                 | <u>55 dB</u>  |
| Enclosure Type             | NEMA 3R Indoor  |
| Enclosure Size             | <u>E3R-7</u>  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015  Registered |



## **OFFICIAL QUOTE**

# 75KVA 110 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|