


#### **OFFICIAL QUOTE**

# 15KVA 208 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



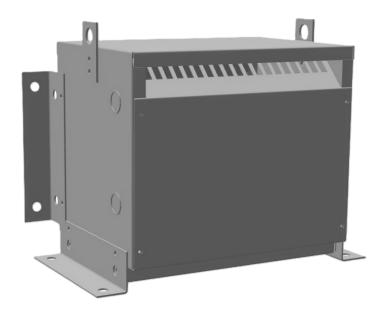

## 15KVA 208 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,041.80 CAD


Three Phase Autotransformer with a capacity of 15kVA, transforming 208Y Volts to 347Y Volts

SKU: RC15B-E

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 15kVA, transforming 208Y Volts to 347Y Volts



### **OFFICIAL QUOTE**



# 15KVA 208 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	42 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	208
Primary Max Current	41.6A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	347
Secondary Max Current	25A
Secondary Markings	H1-H2-H3
Secondary Terminals	<u>Terminal Blocks</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

## 15KVA 208 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------