


OFFICIAL QUOTE

15KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



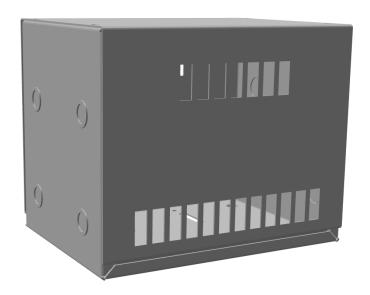

15KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$979.80 CAD


Single Phase Autotransformer with a capacity of 15kVA, transforming 200 Volts to 240 Volts

SKU: MC15B1-C

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 15kVA, transforming 200 Volts to 240 Volts



OFFICIAL QUOTE



15KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 66.6 lbs |
| Phases | 1 |
| kVA | <u>15</u> |
| Connection | <u>1PhA-NT-1</u> |
| Primary Voltage | 200 |
| Primary Max Current | 43.3A |
| Primary Markings | <u>X0-X1</u> |
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 240 |
| Secondary Max Current | 36.1A |
| Secondary Markings | <u>H0-H1</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 180°C (Class F) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | 40 dB |
| Enclosure Type | NEMA 1 |
| Enclosure Size | <u>E1-0</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

15KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | <u>Canada/RPM</u> |
|----------------------|-------------------|
|----------------------|-------------------|