



225KVA 277 VOLTS TO 440 VOLTS
THREE PHASE AUTOTRANSFORMER



225KVA 277 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER


\$7,496.37 USD

Three Phase Autotransformer with a capacity of 225kVA, transforming 277Y Volts to 440Y Volts

SKU: RC225D-H2

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

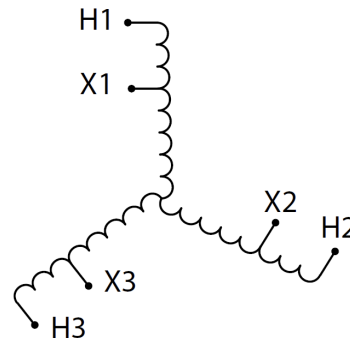

Three Phase Autotransformer with a capacity of 225kVA, transforming 277Y Volts to 440Y Volts



PRODUCT SPECIFICATIONS

Weight	726 lbs
Phases	3
kVA	225
Connection	3PhA-NT-1
Primary Voltage	277
Primary Max Current	469A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	440
Secondary Max Current	295.2A
Secondary Markings	H1-H2-H3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



Country/Manufacturer

[Canada/RPM](#)