



112KVA 115 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER



**112KVA 115 VOLTS TO 575
VOLTS THREE PHASE
AUTOTRANSFORMER**


\$11,038.70 CAD

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 115Y Volts to 575Y Volts

SKU: RC112A1-J1

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

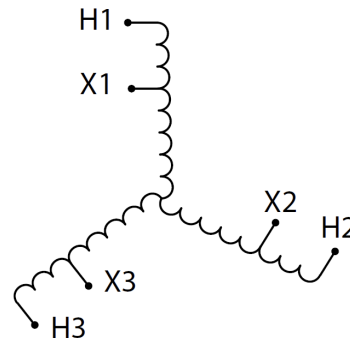

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 115Y Volts to 575Y Volts



PRODUCT SPECIFICATIONS

Weight	789 lbs
Phases	3
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	115
Primary Max Current	564.8A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	575
Secondary Max Current	113A
Secondary Markings	H1-H2-H3
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

112KVA 115 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)