


#### **OFFICIAL QUOTE**

## 30VA 230 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER



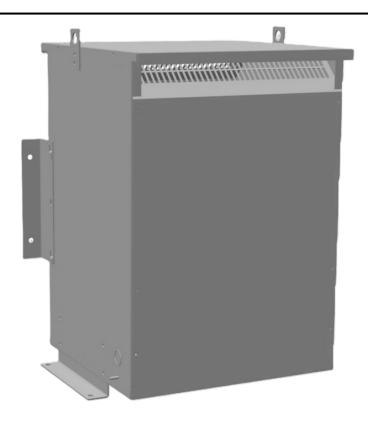

### 30VA 230 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$4,260.06 CAD

Three Phase Isolation Transformer with a capacity of 30kVA, transforming 230 Volts to 600Y/347 Volts

**SKU:** BA30C1-Q/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 30kVA, transforming 230 Volts to 600Y/347 Volts



#### **OFFICIAL QUOTE**



### 30VA 230 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### **PRODUCT SPECIFICATIONS**

Weight	298 lbs
Phases	<u>3</u>
kVA	30
Connection	3Ph-DY-5T-SU
Primary Voltage	230
Primary Max Current	75.31A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	600Y/347
Secondary Max Current	28.87A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.23% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



#### **OFFICIAL QUOTE**



# 30VA 230 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey