


OFFICIAL QUOTE

75KVA 440 VOLTS TO 230 VOLTS SINGLE PHASE AUTOTRANSFORMER



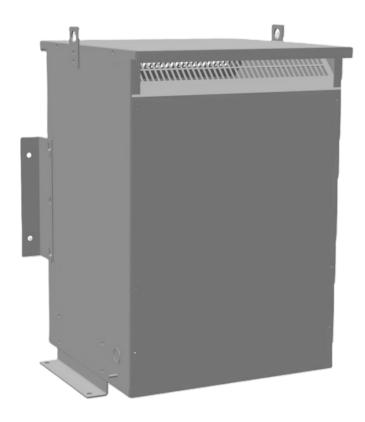

75KVA 440 VOLTS TO 230 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$4,857.90 CAD


Single Phase Autotransformer with a capacity of 75kVA, transforming 440 Volts to 230 Volts

SKU: MC75H2-C1

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 75kVA, transforming 440 Volts to 230 Volts



OFFICIAL QUOTE



75KVA 440 VOLTS TO 230 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	313 lbs
Phases	1
kVA	<u>75</u>
Connection	<u>1PhA-NT-1</u>
Primary Voltage	440
Primary Max Current	98.4A
Primary Markings	<u>H0-H1</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	230
Secondary Max Current	188.3A
Secondary Markings	<u>X0-X1</u>
Secondary Terminals	600MCM-2
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	45 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 440 VOLTS TO 230 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------