


OFFICIAL QUOTE

SA15B-K/Z3



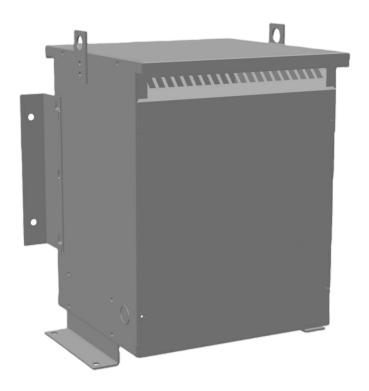


SA15B-K/Z3


\$1,895.00 CAD

SKU: e2ab568e7c36

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

Weight	145 lbs
Phases	1
kVA	<u>15</u>
Connection	1Ph-2coil-5t-SD
Primary Voltage	208
Primary Max Current	72.1A
Primary Markings	<u>H1-H2</u>



OFFICIAL QUOTE

SA15B-K/Z3



Primary Terminals	#2-14 AWG
Secondary Voltage	120/240
Secondary Max Current	<u>125A</u>
Secondary Markings	<u>X1-X3-X2-X4</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Aluminum</u>
Insuation Class	220°C
BIL (Insulation) Level	<u>10kV</u>
Impedance	4.0 - 6.0%
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure	<u>E3R-4</u>
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	97.70%