


OFFICIAL QUOTE

25KVA 440 VOLTS TO 460 VOLTS SINGLE PHASE AUTOTRANSFORMER



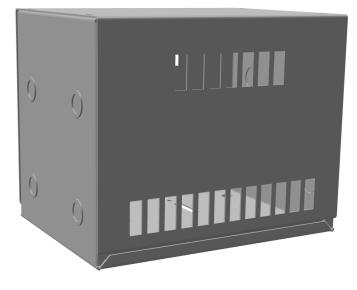

25KVA 440 VOLTS TO 460 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$537.94 USD

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 460 Volts

SKU: MC25H2-H1 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



H0 / X0	X1	H1

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 460 Volts



OFFICIAL QUOTE

25KVA 440 VOLTS TO 460 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	58 lbs	
Phases	1	
kVA	<u>25</u>	
Connection	<u>1PhA-NT-1</u>	
Primary Voltage	<u>440</u>	
Primary Max Current	<u>32.8A</u>	
Primary Markings	<u>X0-X1</u>	
Primary Terminals	Terminal Blocks	
Secondary Voltage	<u>460</u>	
Secondary Max Current	<u>31.4A</u>	
Secondary Markings	<u>H0-H1</u>	
Secondary Terminals	Terminal Blocks	
Primary Taps	N/A	
Conductor Material	<u>Copper</u>	
Insulation Class	<u>180°C (Class F)</u>	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	<u>N/A</u>	
Impedance Range	<u>0.5 – 1.5%</u>	
Sound (db)	<u>40 dB</u>	
Enclosure Type	NEMA 1	
Enclosure Size	<u>E1-0</u>	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	



OFFICIAL QUOTE

25KVA 440 VOLTS TO 460 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM