



112KVA 208 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,037.02 USD

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 208Y Volts to 277Y Volts

SKU: RC112B-D

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

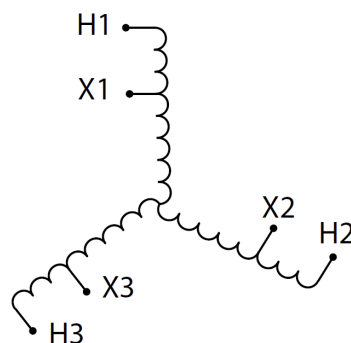

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 208Y Volts to 277Y Volts



PRODUCT SPECIFICATIONS

Weight	206 lbs
Phases	3
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	208
Primary Max Current	312.3A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	277
Secondary Max Current	234.5A
Secondary Markings	H1-H2-H3
Secondary Terminals	600MCM-2
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

112KVA 208 VOLTS TO 277 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------