

112KVA 416 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



\$2,063.20 CAD

Three Phase Autotransformer with a capacity of
112.5kVA, transforming 416Y Volts to 440Y Volts

SKU: RC112G-H2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

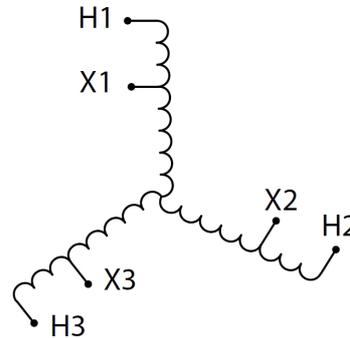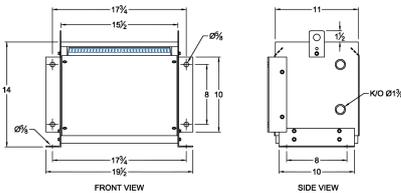

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 416Y Volts to 440Y Volts



PRODUCT SPECIFICATIONS

Weight	43 lbs
Phases	3
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	416
Primary Max Current	156.1A
Primary Markings	X1-X2-X3
Primary Terminals	300MCM-6
Secondary Voltage	440
Secondary Max Current	147.6A
Secondary Markings	H1-H2-H3
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-3
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



Country/Manufacturer

[Canada/RPM](#)