


#### **OFFICIAL QUOTE**

## 15KVA 200 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



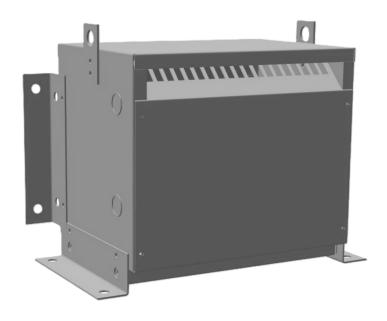

### 15KVA 200 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,268.00 CAD


Three Phase Autotransformer with a capacity of 15kVA, transforming 200Y Volts to 600Y Volts

SKU: RC15B1-J

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 15kVA, transforming 200Y Volts to 600Y Volts



#### **OFFICIAL QUOTE**



# 15KVA 200 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	76 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	3PhA-NT-1
Primary Voltage	200
Primary Max Current	43.3A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	600
Secondary Max Current	14.4A
Secondary Markings	H1-H2-H3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	45
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



#### **OFFICIAL QUOTE**

### 15KVA 200 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------