



## 2000KVA 416 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



**\$81,002.60 CAD**

Three Phase Autotransformer with a capacity of 2000kVA, transforming 416Y Volts to 277Y Volts

**SKU:** RC2000G-D

**Categories:** [Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

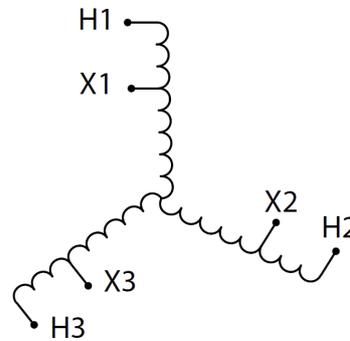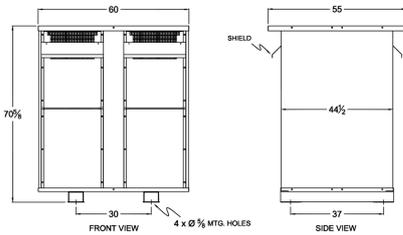

Three Phase Autotransformer with a capacity of 2000kVA, transforming 416Y Volts to 277Y Volts



PRODUCT SPECIFICATIONS

Weight	6106 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">2000</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">416</a>
Primary Max Current	<a href="#">2775.7A</a>
Primary Markings	<a href="#">H1-H2-H3</a>
Primary Terminals	<a href="#">Pads</a>
Secondary Voltage	<a href="#">277</a>
Secondary Max Current	<a href="#">4168.6A</a>
Secondary Markings	<a href="#">X1-X2-X3</a>
Secondary Terminals	<a href="#">Pads</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Insulation Class	<a href="#">220°C (Class H)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.0 – 3.0%</a>
Sound (db)	<a href="#">62</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-11</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

2000KVA 416 VOLTS TO 277 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)