


OFFICIAL QUOTE

25KVA 440 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



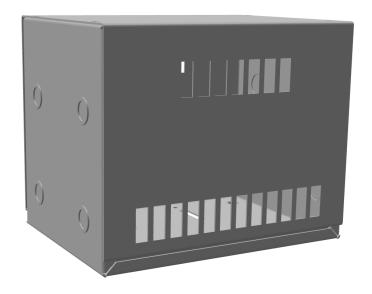

25KVA 440 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$908.00 CAD

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 480 Volts

SKU: MC25H2-H

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 480 Volts



OFFICIAL QUOTE





PRODUCT SPECIFICATIONS

| Weight | 65.1 lbs |
|----------------------------|--|
| Phases | 1 |
| kVA | <u>25</u> |
| Connection | 1PhA-NT-1 |
| Primary Voltage | 440 |
| Primary Max Current | 32.8A |
| Primary Markings | <u>X0-X1</u> |
| Primary Terminals | Terminal Blocks |
| Secondary Voltage | 480 |
| Secondary Max Current | 30.1A |
| Secondary Markings | <u>H0-H1</u> |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 180°C (Class F) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 - 1.5% |
| Sound (db) | 40 dB |
| Enclosure Type | NEMA 1 |
| Enclosure Size | <u>E1-0</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

25KVA 440 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|