


OFFICIAL QUOTE

45KVA 230 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



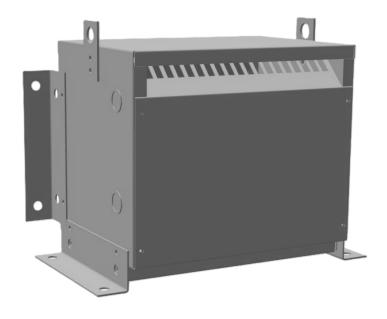

45KVA 230 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,387.50 CAD


Three Phase Autotransformer with a capacity of 45kVA, transforming 230Y Volts to 277Y Volts

SKU: RC45C1-D

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 45kVA, transforming 230Y Volts to 277Y Volts



OFFICIAL QUOTE



45KVA 230 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	56 lbs
Phases	<u>3</u>
kVA	<u>45</u>
Connection	3PhA-NT-1
Primary Voltage	230
Primary Max Current	113A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	300MCM-6
Secondary Voltage	277
Secondary Max Current	93.8A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

45KVA 230 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------