


OFFICIAL QUOTE

75KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER



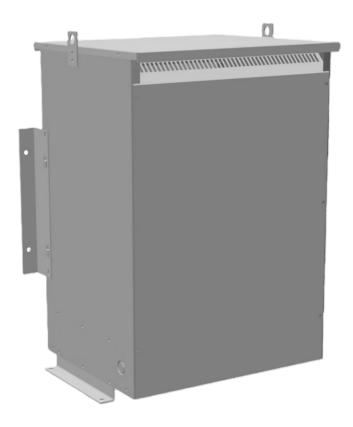

75KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$4,814.35 USD


Single Phase Autotransformer with a capacity of 75kVA, transforming 110 Volts to 416 Volts

SKU: MC75A2-G

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 75kVA, transforming 110 Volts to 416 Volts



OFFICIAL QUOTE



75KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	451.1 lbs
Phases	1
kVA	<u>75</u>
Connection	<u>1PhA-NT-1</u>
Primary Voltage	110
Primary Max Current	393.6A
Primary Markings	<u>X0-X1</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	416
Secondary Max Current	104.1A
Secondary Markings	<u>H0-H1</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 - 4.5%
Sound (db)	<u>55 dB</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------