


#### **OFFICIAL QUOTE**

## 75KVA 208 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



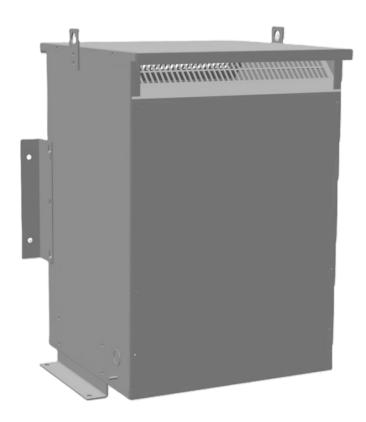

### 75KVA 208 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER


\$4,800.60 CAD


Three Phase Autotransformer with a capacity of 75kVA, transforming 208Y Volts to 110Y Volts

SKU: RC75B-A2

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 75kVA, transforming 208Y Volts to 110Y Volts



### **OFFICIAL QUOTE**



# 75KVA 208 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	271 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	3PhA-NT-1
Primary Voltage	208
Primary Max Current	208.2A
Primary Markings	H1-H2-H3
Primary Terminals	600MCM-2
Secondary Voltage	110
Secondary Max Current	393.6A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

# 75KVA 208 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------