



75KVA 208 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$5,045.90 CAD

Single Phase Autotransformer with a capacity of 75kVA, transforming 208 Volts to 416 Volts

SKU: MC75B-G

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

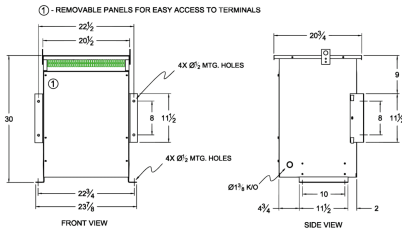

Single Phase Autotransformer with a capacity of 75kVA, transforming 208 Volts to 416 Volts



PRODUCT SPECIFICATIONS

| | |
|---------------------------------------|--|
| Weight | 325.1 lbs |
| Phases | 1 |
| kVA | 75 |
| Connection | 1PhA-NT-1 |
| Primary Voltage | 208 |
| Primary Max Current | 208.2A |
| Primary Markings | X0-X1 |
| Primary Terminals | 600MCM-2 |
| Secondary Voltage | 416 |
| Secondary Max Current | 104.1A |
| Secondary Markings | H0-H1 |
| Secondary Terminals | #2/0-6 AWG |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 – 3.5% |
| Sound (db) | 45 dB |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-6 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

75KVA 208 VOLTS TO 416 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)