

## 75KVA 208 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



**\$5,177.00 CAD**

Three Phase Autotransformer with a capacity of 75kVA, transforming 208Y Volts to 440Y Volts

SKU: RC75B-H2

Categories: [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

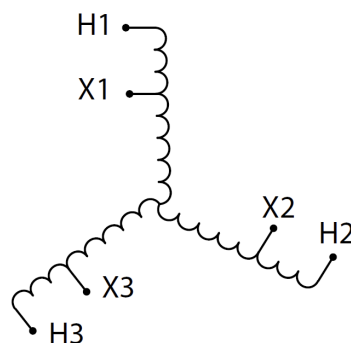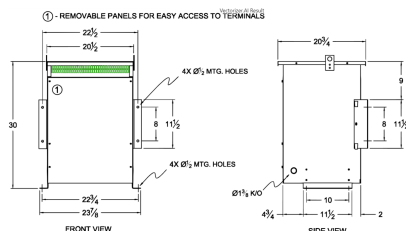

Three Phase Autotransformer with a capacity of 75kVA, transforming 208Y Volts to 440Y Volts



## PRODUCT SPECIFICATIONS

Weight	308 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">75</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">208</a>
Primary Max Current	<a href="#">208.2A</a>
Primary Markings	<a href="#">X1-X2-X3</a>
Primary Terminals	<a href="#">600MCM-2</a>
Secondary Voltage	<a href="#">440</a>
Secondary Max Current	<a href="#">98.4A</a>
Secondary Markings	<a href="#">H1-H2-H3</a>
Secondary Terminals	<a href="#">#2/0-6 AWG</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Insulation Class	<a href="#">220°C (Class H)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.5 – 3.5%</a>
Sound (db)	<a href="#">45</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-6</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE  
75KVA 208 VOLTS TO 440 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<a href="#">Canada/RPM</a>
----------------------	----------------------------