


#### **OFFICIAL QUOTE**

## 75KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



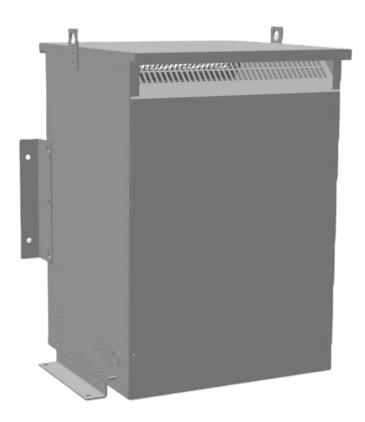

# 75KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

\$4,682.70 CAD

Three Phase Autotransformer with a capacity of 75kVA, transforming 220Y Volts to 400Y Volts

**SKU:** RC75C2-G1

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 75kVA, transforming 220Y Volts to 400Y Volts



### **OFFICIAL QUOTE**



## 75KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |   |
|----------------------------|---|
| Weight                     | 257 lbs   |
| Phases                     | <u>3</u>  |
| kVA                        | <u>75</u>   |
| Connection                 | 3PhA-NT-1   |
| Primary Voltage            | 220   |
| Primary Max Current        | 196.8A  |
| Primary Markings           | <u>X1-X2-X3</u>   |
| Primary Terminals          | 600MCM-2  |
| Secondary Voltage          | 400   |
| Secondary Max Current      | 108.3A  |
| Secondary Markings         | <u>H1-H2-H3</u>   |
| Secondary Terminals        | #2/0-6 AWG  |
| Primary Taps               | N/A   |
| Conductor Material         | Copper  |
| Insulation Class           | 220°C (Class H)   |
| BIL (Insulation) Level     | 10kV  |
| Efficiency (@35% Load) %   | N/A   |
| Impedance Range            | 1.5 - 3.5%  |
| Sound (db)                 | 45  |
| Enclosure Type             | NEMA 3R Indoor  |
| Enclosure Size             | E3R-6   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015  Registered |



### **OFFICIAL QUOTE**

## 75KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|