



OFFICIAL QUOTE

75KVA 230 VOLTS TO 550 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



75KVA 230 VOLTS TO 550  
VOLTS SINGLE PHASE  
AUTOTRANSFORMER



**\$5,723.00 CAD**

Single Phase Autotransformer with a capacity of 75kVA, transforming 230 Volts to 550 Volts

SKU: MC75C1-J2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

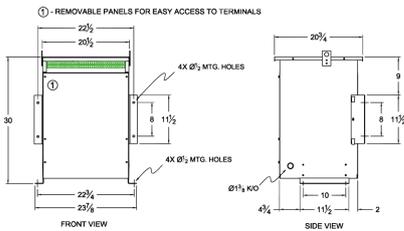

Single Phase Autotransformer with a capacity of 75kVA, transforming 230 Volts to 550 Volts



OFFICIAL QUOTE

75KVA 230 VOLTS TO 550 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	368.9 lbs
Phases	<a href="#">1</a>
kVA	<a href="#">75</a>
Connection	<a href="#">1PhA-NT-1</a>
Primary Voltage	<a href="#">230</a>
Primary Max Current	<a href="#">188.3A</a>
Primary Markings	<a href="#">X0-X1</a>
Primary Terminals	<a href="#">600MCM-2</a>
Secondary Voltage	<a href="#">550</a>
Secondary Max Current	<a href="#">78.7A</a>
Secondary Markings	<a href="#">H0-H1</a>
Secondary Terminals	<a href="#">#2/0-6 AWG</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Insulation Class	<a href="#">220°C (Class H)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.5 – 3.5%</a>
Sound (db)	<a href="#">45 dB</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-6</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

75KVA 230 VOLTS TO 550 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)