


OFFICIAL QUOTE

75KVA 277 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



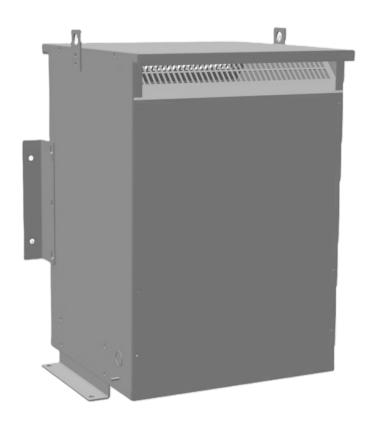

75KVA 277 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER


\$5,463.70 CAD


Three Phase Autotransformer with a capacity of 75kVA, transforming 277Y Volts to 115Y Volts

SKU: RC75D-A1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 75kVA, transforming 277Y Volts to 115Y Volts



OFFICIAL QUOTE



75KVA 277 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	347 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	277
Primary Max Current	156.3A
Primary Markings	H1-H2-H3
Primary Terminals	300MCM-6
Secondary Voltage	115
Secondary Max Current	376.5A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 277 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------