


OFFICIAL QUOTE

9KVA 200 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER



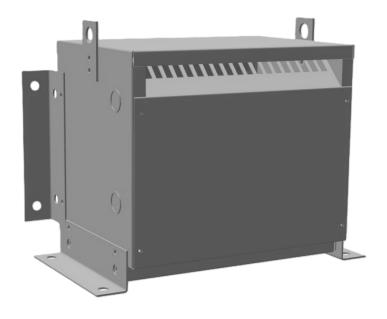

9KVA 200 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,846.00 CAD

Three Phase Autotransformer with a capacity of 9kVA, transforming 200Y Volts to 460Y Volts

SKU: RC9B1-H1

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 9kVA, transforming 200Y Volts to 460Y Volts



OFFICIAL QUOTE



9KVA 200 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 35 lbs |
| Phases | <u>3</u> |
| kVA | 9 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 200 |
| Primary Max Current | 26A |
| Primary Markings | <u>X1-X2-X3</u> |
| Primary Terminals | Terminal Blocks |
| Secondary Voltage | 460 |
| Secondary Max Current | 11.3A |
| Secondary Markings | <u>H1-H2-H3</u> |
| Secondary Terminals | <u>Terminal Blocks</u> |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 - 3.5% |
| Sound (db) | 40 |
| Enclosure Type | NEMA 1 |
| Enclosure Size | <u>E1-3</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

9KVA 200 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|