


OFFICIAL QUOTE

9KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



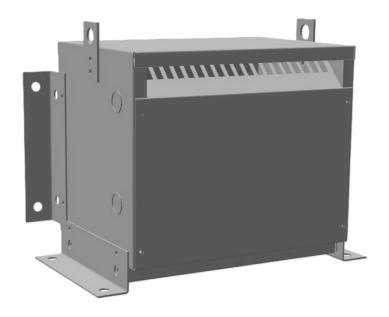

9KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,808.20 CAD

Three Phase Autotransformer with a capacity of 9kVA, transforming 440Y Volts to 200Y Volts

SKU: RC9H2-B1

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 9kVA, transforming 440Y Volts to 200Y Volts



OFFICIAL QUOTE

9KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	33 lbs
Phases	<u>3</u>
kVA	9
Connection	3PhA-NT-1
Primary Voltage	440
Primary Max Current	11.8A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	200
Secondary Max Current	26A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

9KVA 440 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------