




**BC112Q-M/Z3**

**\$9,286.15 USD**

**SKU:** 0a2bb5290170

**Categories:** [Isolation Transformers](#)

## SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

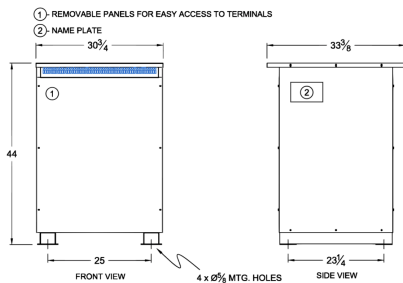

## PRODUCT SPECIFICATIONS

<b>Weight</b>	950 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">112.5</a>
<b>Connection</b>	<a href="#">3Ph-YY-5T-SD</a>
<b>Primary Voltage</b>	<a href="#">600Y/347</a>



Primary Max Current	<a href="#">108.3A</a>
Primary Markings	<a href="#">H0-H1-H2-H3</a>
Primary Terminals	<a href="#">300MCM-6</a>
Secondary Voltage	<a href="#">208Y/120</a>
Secondary Max Current	<a href="#">312.3A</a>
Secondary Markings	<a href="#">X0-X1-X2-X3</a>
Secondary Terminals	<a href="#">Pads</a>
Primary Taps	<a href="#">+/- 2 x 2.5%</a>
Conductor Material	<a href="#">Copper</a>
Insuation Class	<a href="#">220°C</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Impedance	<a href="#">4.0 – 6.0%</a>
Sound (db)	<a href="#">50</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure	<a href="#">E3R-8</a>
Finish	<a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Efficiency	<a href="#">98.74%</a>