


OFFICIAL QUOTE

BC30J-M/EP



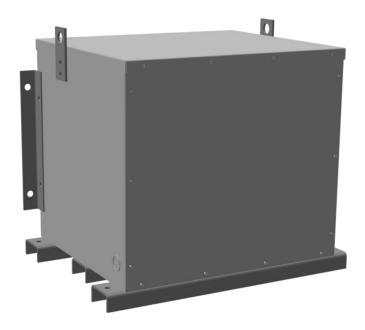


BC30J-M/EP


\$5,196.53 USD

SKU: a7165765d701

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 520 lbs |
|---------------------|---------------------|
| Phases | 3 |
| kVA | 30 |
| Connection | <u>3Ph-DY-5T-SD</u> |
| Primary Voltage | 600 |
| Primary Max Current | 28.9A |
| Primary Markings | <u>H1-H2-3</u> |
| Primary Terminals | #2-14 AWG |



OFFICIAL QUOTE

BC30J-M/EP



| Secondary Voltage | <u>208Y/120</u> |
|----------------------------|--|
| Secondary Max Current | 83.3A |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | #2/0-6 AWG |
| Primary Taps | <u>+/- 2 x 2.5%</u> |
| Conductor Material | <u>Copper</u> |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C |
| BIL (Insulation) Level | 10kV |
| Efficiency | N/A |
| Impedance | 1.5 - 3.5% |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | <u>E3R-3PEP-5</u> |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |